

## HDMI 1X2 1X4 Splitter

Model no: SPP-HDMI-1200 / SPP-HDMI-1201

aegis's HDMI Splitter is a product which can distribute HDMI signal without loss to one or more high definition display device such as HDTV. It can optimize your home theatre system to the best effect. HDMI signal is distributed from source device such as DVD, Satellite Receiver, Set-Top Box, DV Camera, A/V Receiver and other HDMI enabled device to two or four high definition display devices such as HDTV and HDMI Flat panel Display.




### FEATURE


- Fully HDMI 1.4 specification compliant. It is applicable to source device and high definition display device, such as DVD and HDTV which have HDMI Ports or digital ports and are compliant with HDCP protocol.
- Support high resolutions:480i/p,576i/p,720i/p,1080i/p,4Kx2K@25/30Hz.
- Support 30/36 dark, extended color space support, including:SYCC601 \ Adobe RGB \ AdobeYCC601
- Blu-ray DVD 24/50/60fs/HD-DVD/xvYCC.
- Audio formats DTS-HD/Dolby-TrueHD/LPCM7.1/DTS/Dolby-AC3 and DSD.
- Extend the transmission distance and improve transmission signal.
- Compatible with DVI by using HDMI to DVI adapter.
- Plug- and -play.
- Metal casing design and overall shielding without signal interference.
- Led indicates signal and power mode.
- Power supply (please refer to technical parameter).
- Support 3D

● CONNECTION DIAGRAM

SPP-HDMI-1200

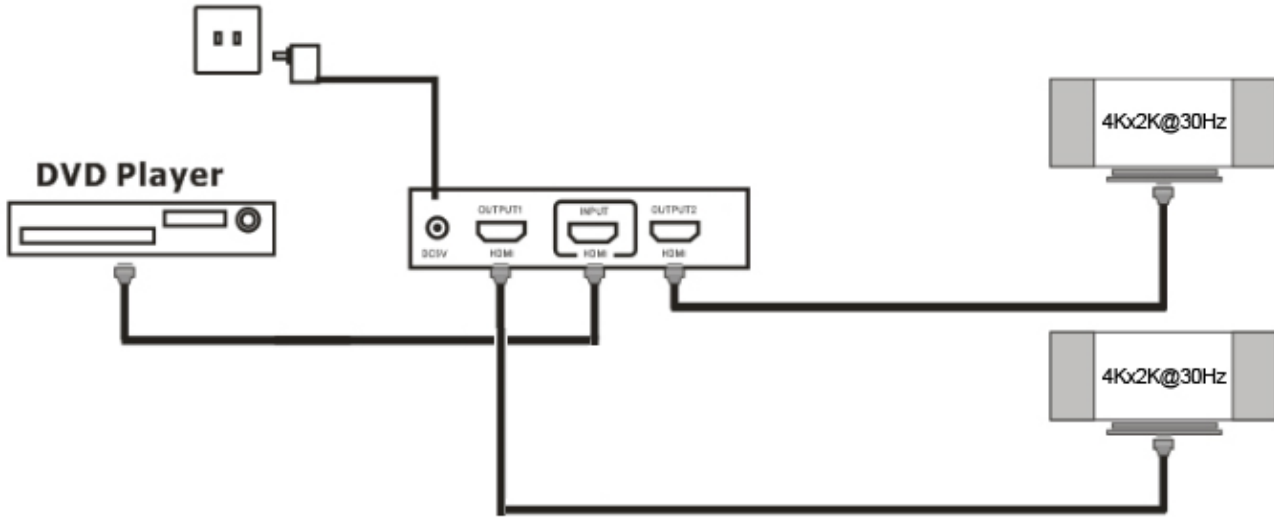

SPP-HDMI-1201

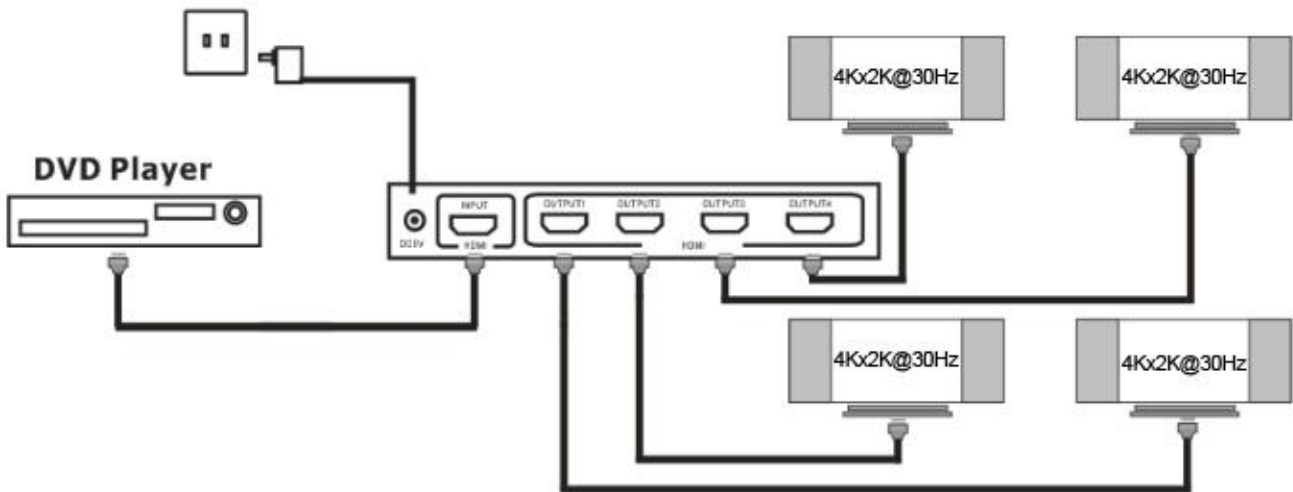

## ● TECHNICAL SPECIFICATION

	SPP-HDMI-1200	SPP-HDMI-1201
HDMI Source Input Port	1	
Display Device Output Port	2	4
Source Port Connector	19 PIN HDMI	
Display Device Port Connector	19 PIN HDMI	
HDCP Compliant	YES	
Single Link Range	3840x2160	
Input Video Signal	0.5-1.0 Volts P-P	
Input DDC Signal	5 Volts P-P(TTL)	
Deep Color	48 Bit	
HDMI Version	HDMI1.4b	
Bandwidth	Up to 340Mhz	
Signal Speed	Up to 3.4Gbps	
The length of input cable	1080P≤20M,4k2k≤15M HDMI Cable	
The length of output cable	1080P≤20M,4k2k≤15M HDMI Cable	
The cable standard	26AWG HDMI1.4	
Vertical Frequency Range	60Hz	
Power Consumption (max.)	5Watts	5Watts
Operation Temperature	15°C to +55°C	
Working Voltage	DC 5V	
Power Adaptor	5V 1A	
Net Weight	0.139Kg	0.23Kg
Dimension: L*W*H(mm)	128x53x23.5	178x67x23