4KVIEWER SERIES

aegis 4KVIEWER系列 是一款先進高性能的切換器。用戶只要使用一組鍵盤滑鼠即可輕鬆切換與作業四部電腦或四個影音來源。 且藉由滑鼠游標來做移動、縮放、切換、隱藏與編輯等功能 ， 使畫面能多種呈現 , 包括四分割畫面、三分割、二分割、全畫面、PiP(圖中圖)，PbP(多重圖)，PoP(圖上圖)， 更可以自由的配置圖像以及擁有畫面消失的選擇與隱形畫面的功能 。 簡易安裝，輕鬆上手 。 4KVIEWER系列提供完善且多樣化的產品功能，以滿足多視窗顯示的應用需求。

應用產業：銀行金融業、航空運輸業、醫療產業及任何有即時監控需求的市場。

Features

- 支援4Kx2K/30Hz超高解析度
- 支援PiP, PoP與PbP畫面分割功能
- 支援任一個影音畫面全螢幕演示功能
- 支援HDMI影音輸入畫面開啟，隱藏及呼叫功能
- 支援3種自由模式，客戶可自行設計畫面分割模式
- 支援4個影音來源或電腦主機顯示在同一個螢幕
- 支援畫面任意移動；縮放及編輯功能
- 支援4個影音來源的音頻切換及選擇
- 支援4個影音來源的音頻靜音功能
- 支援USB 2.0鼠標&鍵盤控制
- 支援遠程主機桌面控制與數據抓取功能
- 支援多種作業平台與操作系統
- 支援多種管理模式；鼠標；鍵盤；紅外線遙控器與前板按鍵

SPECIFICATION

Product Model		4KVIEWER-KVM-4	4KVIEWER-HDMI-4
Product Image			
General	Input Ports	Video: HDMI Jack x 4 KVM: USB-B Jack x 4 Console: USB-A Jack X 2(Keyboard / Mouse) Press Button X 4 Infrared: Infrared Receiver Module X 1 Power: Locking DC Jack X 1	Video: HDMI Jack x 4 Console: USB-A Jack X 2 (Keyboard / Mouse) Press Button X 4 Infrared: Infrared Receiver Module X 1 Power: Locking DC Jack x 1
	Output Ports	Video: HDMI Jack x 1	Video: HDMI Jack x 1
	HDMI Version	HDMI 1.4	HDMI 1.4
	HDCP Version	HDCP 1.4	HDCP 1.4
	USB Version	USB 2.0	USB 2.0
	Resolution	Up to 4KX2K/30Hz	Up to 4KX2K/30Hz
	Deep Color	Up to 12 bit	Up to 12 bit
	Audio	Up to 8 Channels (7.1)	Up to 8 Channels (7.1)
	Infrared	38KHz Frequency	38KHz Frequency
	Distance	28AWG-2M / 26AWG-5M -4K 28AWG-2M / 26AWG-5M -1080p	28AWG-2M / 26AWG-5M -4K 28AWG-2M / 26AWG-5M -1080p
	Power	100~240V, 12VDC / 2.0Amp.	100~240V, 12VDC / 2.0Amp.
	Consumption	24 Watt Max.	24 Watt Max.
Physical	Product Dimension	(L) 8.3in X (W) 5.7in X (H) 2.0in (210mm X 146mm X 52mm)	(L) 8.3in X (W) 5.7in X (H) 2.0in (210mm X 146mm X 52mm)
	Product Weight	1.84 lb / 829g	1.83 lb / 819g"
	Package Dimension	258mm X 198mm X 97mm	258mm X 198mm X 97mm
	Package Weight	1247g	1237g
	Package Content	4KVIEWER-KVM-4 X 1 PCS Infrared Controller X 1 PCS Universal Power Adapter X 1 PCS Screw X 4 PCS User Manual X 1 PCS"	4KVIEWER-HDMI-4 X 1 PCS Infrared Controller X 1 PCS Universal Power Adapter X 1 PCS Screw X 4 PCS User Manual X 1 PCS
Environmental	Operation Temperature	32°F - 104°F (0°C - 40°C)	32°F - 104°F (0°C - 40°C)
	Storage Temperature	32°F - 176°F (0°C - 80°C)	32°F - 176°F (0°C - 80°C)
	Humidity	20% - 90% (Non-Condensing)"	20% - 90% (Non-Condensing)

4KVIEWER-KVM-4

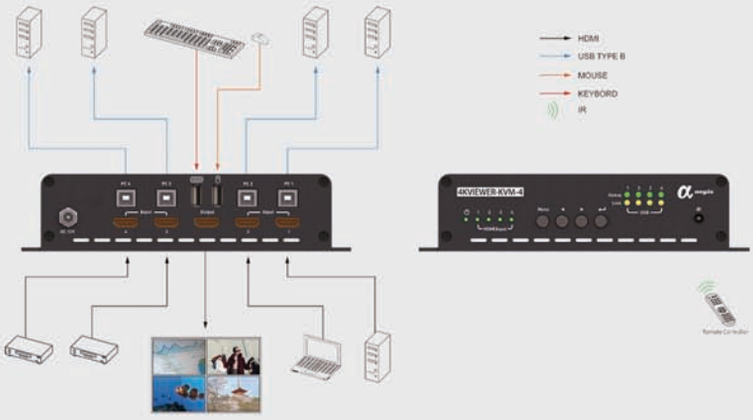
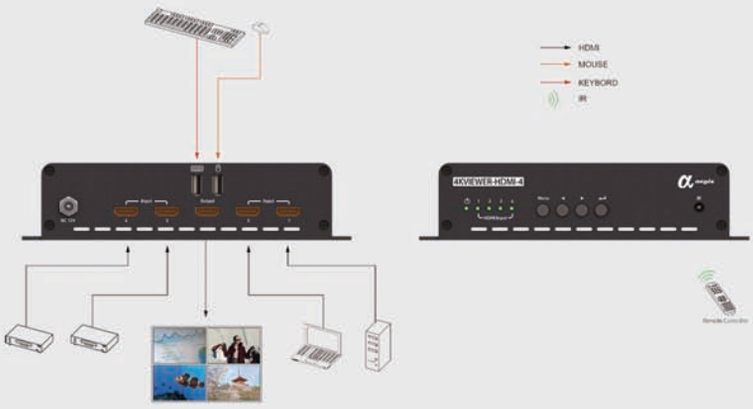
4KVIEWER-HDMI-4