








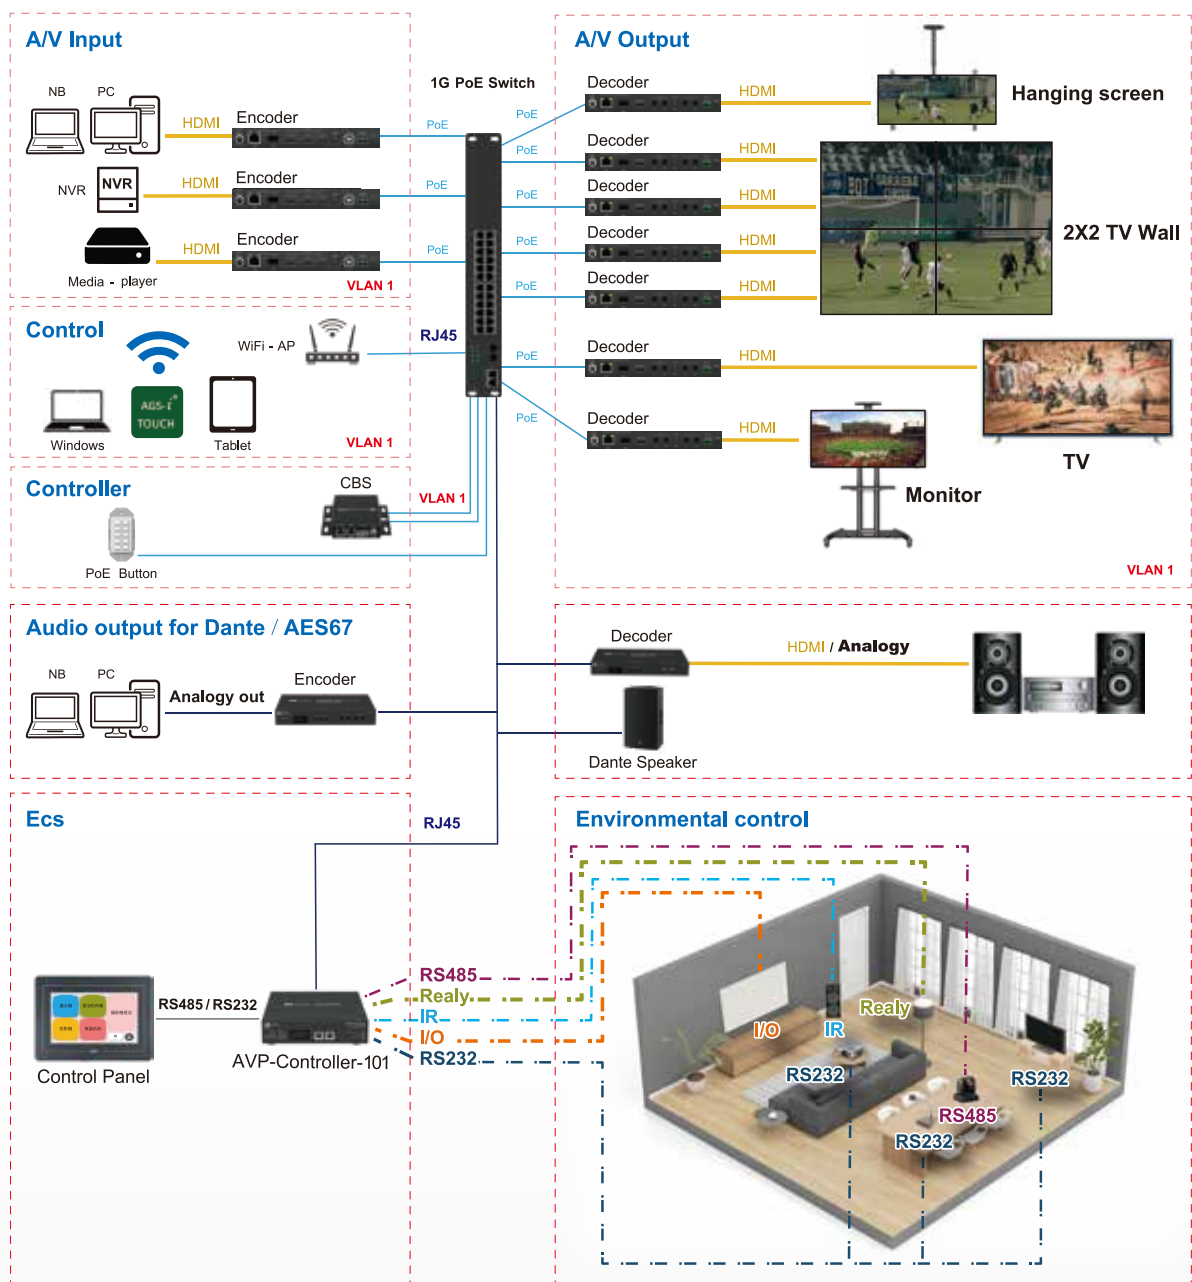

環控系統再進化

AV over IP

降低成本、集中控制、擴充容易、視覺化管理



SPECIFICATION

產品系列	AVP-1K	AVP-2K	AVP-4K	AVP-6K
編碼器 (TX)				
解碼器 (RX)				
網路交換機	1 Gigabit	1 Gigabit	1 Gigabit	1 Gigabit
影像輸入源	HDMI	HDMI	HDMI	HDMI, USB-C
最高輸出解析度	1080p 60Hz	1080p 60Hz	4K 30Hz 4:2:0	4K 60Hz 4:4:4
軟體控制盒		AVP-CBS2K	AVP-CBS2K	AVP-Controller
軟體控制盒介面		RJ45, RS232	RJ45, RS232	IR, RS485, RS232, RELAY, I/O, RJ45
Dante Embedding			V	V
Dante Breakout			V	V
AES67 Embedding				V
AES67 Breakout				V
解析度支援	720p - 1080p	720p - 1080p	720p - 4K 30Hz	720p - 4K 60Hz
USB / KVM		V	V	V
矩陣	V	V	V	V
電視牆	V	V	V	V
控制功能支援	IR, RS232, CEC	IR, USB, RS232, CEC	IR, USB, RS232, CEC	IR, USB, RS232, CEC

FEATURES

- ✓ Support Control Methods:
IP control box, PC configurator and APP
支援三種控制方式：IP網頁控制, PC後台軟體控制 及APP 平板控制
- ✓ Supports PoE+
具PoE功能無須額外插電
- ✓ Support EDID, HDCP & CEC
支援EDID, HDCP 和CEC
- ✓ Support third party control system integration
支援第三方系統整合與控制
- ✓ video wall up to 16 x 16
電視牆最多支援16x16
- ✓ Support fast and seamless switching
具快速與無縫的切換特色



PoE+



16x16 Video Wall



EDID



Seamless Switch



Third Party Integration

