

# Dual C to Dual HDMI / DP with KVM

## FEATURES

- KVM, allows user to control two laptops connects with the Switcher via USB Type-C interface, and then HDMI signal output to Dual monitors, both MST (Window only) and SST of displays mode are supported.
- Maximum resolution up to 4K/60Hz.
- Light in weight and also without additional power requirements, a real plug 'n play portable solution.
- Support PD 3.0 Max 100W via port 2.
- iPad Pro compatible.
- Support Samsung DeX mode and Huawei desktop mode, devices other than these two capable of screen mirroring when DP Alt mode is supported.



SWT-USBC-1002



SWT-USBC-1003





# SST

(Single-Stream Transport)



# MST

(Multi Stream Transport)

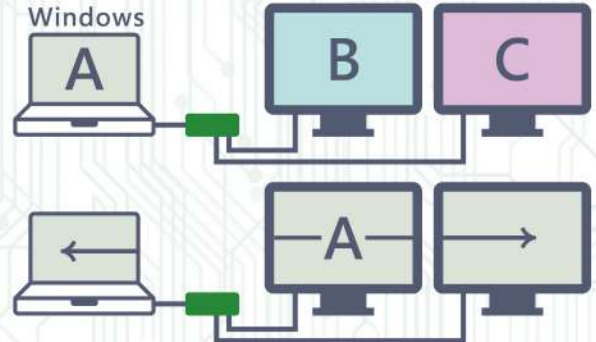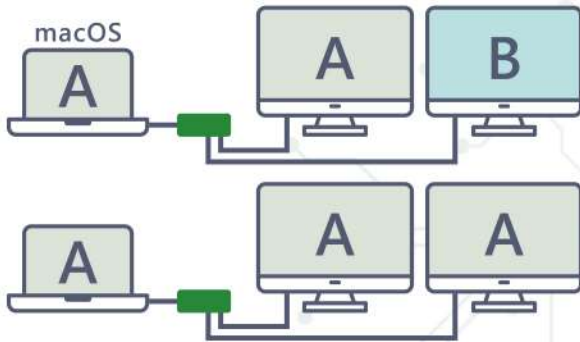

※Apple macOS does not support MST

## SPECIFICATIONS

Model No.	SWT-USBC-1002	SWT-USBC-1003
Model name	Dual C to Dual <b>HDMI</b> with KVM	Dual C to Dual <b>DP</b> with KVM
TYPE C resolution	480P/720P/1080P@24Hz/30Hz/50Hz/60Hz, up to4K@60Hz Supports1080P@120Hz,/3D etc.	480P/720P/1080P@24Hz/30Hz/50Hz/60Hz, up to4K@60Hz Supports1080P@120Hz,/3D etc.
Computer	2xUSB 3.2 2 Type-C Female, Support PD3.0 Max 100W(Port 2)	2xUSB 3.2 2 Type-C Female, Support PD3.0 Max 100W(Port 2)
Device	2x USB2.0 Type-A Female	2x USB2.0 Type-A Female
HDR Support	YES	YES
Output cable length	HDMI:4K/AWG 30 ≤2m,USB3.2-1m	DP:4K/AWG 30 ≤2m,USB3.2-1m
Port Selection	Push Button	Push Button
LEDs	Selected 2 (Green)	Selected 2 (Green)
Max Power Consumption	7.5W	7.5W
Working temperature range	-5 ~ +40°C	-5 ~ +40°C
Working humidity range	5 to 85%RH(No Condensation)	5 to 85%RH(No Condensation)
Storage temperature	-15 to 60°C	-15 to 60°C
Storage humidity	5 ~95%RH(No Condensation)	5 ~95%RH(No Condensation)
Size	77.95 x 77.95 x 26.8 mm	77.95 x 77.95 x 26.8 mm
Weight	160g	160g
Accessories	Manual x1 ; USB C Cable 1m x 2PCS	Manual x1 ; USB C Cable 1m x 2PCS